

## 60W SMPS CUM BATTERY CHARGER

### FEATURES:

- Latest state-of-the-art current mode PWM controller and MOSFET based design.
- Power supply unit & electronics switch over unit are in the same housing.
- AC OK/ SMPS OK and Battery low floating contact for remote signaling.
- Designed for rechargeable battery module up to 14AH.
- LED indications for AC OK, DC OK and Low Battery.
- Protection: Over voltage, Overload, Short circuit.
- Soft start circuit to limit the AC inrush current.
- Reliable even at high ambient temperature.
- UL and CB certifications from UL Solutions.
- Universal AC input voltage range.




### SPECIFICATION:


| PRODUCT CODE          |   | SSM6012   |                  | SSM6024                           |                  |  |  |
|-----------------------|---|---|------------------|-----------------------------------|------------------|--|--|
| OUTPUT                | OUTPUT NUMBER   | CH1: FOR LOAD   | CH2: FOR BATTERY | CH1: FOR LOAD                     | CH2: FOR BATTERY |  |  |
|                       | DC VOLTAGE  | 13.8V   | 13.8V            | 27.6V                             | 27.6V            |  |  |
|                       | RATED CURRENT   | 2.8A  | 1.5A             | 1.4A                              | 0.75A            |  |  |
|                       | CURRENT RANGE   | 0 ~ 4.3A  | -----            | 0 ~ 2.15A                         | -----            |  |  |
|                       | RATED POWER   | 60W   |                  | 60W                               |                  |  |  |
|                       | RIPLE & NOISE (max.)  | <120mVp-p   | -----            | <240mVp-p                         | -----            |  |  |
|                       | VOLTAGE ADJ. RANGE  | CH1: 12 ~ 15V   |                  | CH1: 24 ~ 29V                     |                  |  |  |
|                       | VOLTAGE TOLERANCE Note.2  | < +/-1.0%   | -----            | < +/-1.0%                         | -----            |  |  |
|                       | LINE REGULATION   | < +/-0.5%   | -----            | < +/-0.5%                         | -----            |  |  |
|                       | LOAD REGULATION   | < +/-0.5%   | -----            | < +/-0.5%                         | -----            |  |  |
| INPUT                 | SETUP, RISE TIME Note.3   | <800ms, 50ms/230VAC   |                  | <1700ms, 50ms/115VAC at full load |                  |  |  |
|                       | HOLD UP TIME (Typ.)   | >50ms/230VAC  |                  | >10ms/115VAC at full load         |                  |  |  |
| PROTECTION            | VOLTAGE RANGE   | 100 ~ 265VAC  |                  |                                   |                  |  |  |
|                       | FREQUENCY RANGE   | 50/60Hz   |                  |                                   |                  |  |  |
|                       | EFFICIENCY (Typ.)   | >85%  |                  | >85%                              |                  |  |  |
|                       | AC CURRENT (Typ.)   | <1.6A/115VAC  |                  | <1A/230VAC                        |                  |  |  |
|                       | INRUSH CURRENT (Typ.)   | COLD START <30A/115VAC  |                  | <60A/230VAC                       |                  |  |  |
|                       | LEAKAGE CURRENT   | <1mA  |                  |                                   |                  |  |  |
| FUNCTION              | OVERLOAD  | 105 ~ 150% rated output power<br>Protection type : Auto recovery, recovers automatically after fault condition is removed |                  |                                   |                  |  |  |
|                       | OVER VOLTAGE  | CH1:16 ~ 19V  |                  | CH1:29 ~ 33V                      |                  |  |  |
|                       | BATTERY CUT OFF   | Protection type : Latch, re-power on to recover after fault condition is removed  |                  | 10.5+/-0.5V                       |                  |  |  |
| ENVIRONMENT           | AC OK/SMPS OK   | NO-C PFC output, ON : AC OK/SMPS OK ; OFF : AC Fail/SMPS Fail; (Max. 240VAC/60VDC-500mA)                                  |                  |                                   |                  |  |  |
|                       | BATTERY LOW   | NO-C PFC output, ON : Battery Low ; OFF : Battery OK ; (Max. 240VAC/60VDC-500mA)  |                  | Battery low voltage : <11V        |                  |  |  |
|                       |   | Battery low voltage : <22V  |                  |                                   |                  |  |  |
| SAFETY & EMC (Note 4) | WORKING TEMP.   | -20 ~ +60°C (Refer to "Derating Curve")   |                  |                                   |                  |  |  |
|                       | WORKING HUMIDITY  | 20 ~ 90% RH non-condensing  |                  |                                   |                  |  |  |
|                       | STORAGE TEMP., HUMIDITY   | -20 ~ +85°C, 10 ~ 95% RH  |                  |                                   |                  |  |  |
|                       | TEMP. COEFFICIENT   | +/-0.03%/°C (0~50°C) on CH1 output  |                  |                                   |                  |  |  |
|                       | VIBRATION   | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes  |                  |                                   |                  |  |  |
| OTHERS                | SAFETY STANDARDS  | IEC/UL/CSA 62368-1.0  |                  |                                   |                  |  |  |
|                       | WITHSTAND VOLTAGE   | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC   |                  |                                   |                  |  |  |
|                       | ISOLATION RESISTANCE  | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |                  |                                   |                  |  |  |
|                       | EMC EMISSION  | Designed as per IEC/EN55032 (CISPR32) Class B, IEC/EN61000-3-2,-3   |                  |                                   |                  |  |  |
| NOTE                  | EMC IMMUNITY  | Designed as per IEC/EN61000-4-2,3,4,5,6,8,11  |                  |                                   |                  |  |  |
|                       | MTBF  | 589.7K hrs min. MIL-HDBK-217F (25°C)  |                  |                                   |                  |  |  |
|                       | DIMENSION   | 60*92.5*126mm (L*W*H)   |                  |                                   |                  |  |  |
|                       | WEIGHT  | 0.7Kg   |                  |                                   |                  |  |  |
|                       | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Tolerance : includes set up tolerance, line regulation and load regulation.<br>3. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time.<br>4. The power supply is considered a component which will be installed into a final equipment. Which are basically excluded from the EMC directive. However, in order to enable to customer's end system to comply with the EMC directive. Micro Power's power supply are designed as per applicable EMC directive, but not tested. So, the final equipment must be re-confirmed that it still meets EMC directives.<br>5. The ambient temperature derating of 3.5°C/1000m for operating altitude higher than 2000m.<br>6. Recommended to connect the battery module via a switch for remote shutdown.<br>7. Please do not connect battery below 11.5VDC (23VDC in case of SSM6024).<br>8. We can also use this product as normal SMPS. |   |                  |                                   |                  |  |  |

## 60W SMPS CUM BATTERY CHARGER

### INSTALLATION POSITION:

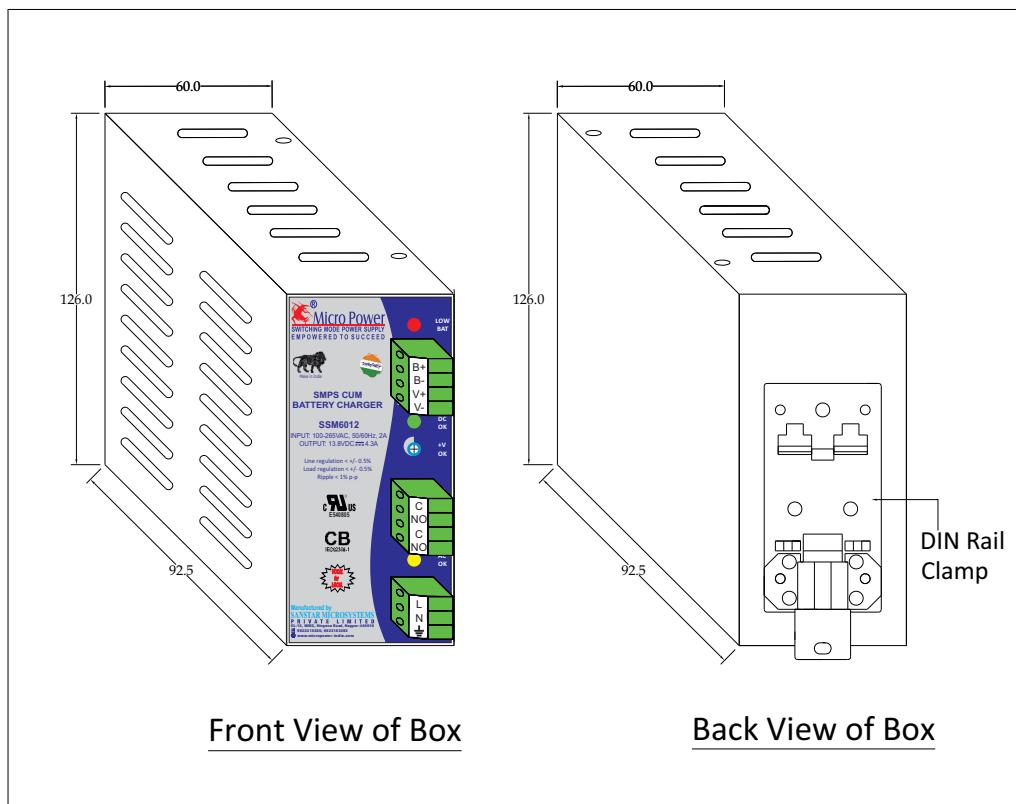


### CONNECTION DIAGRAM:

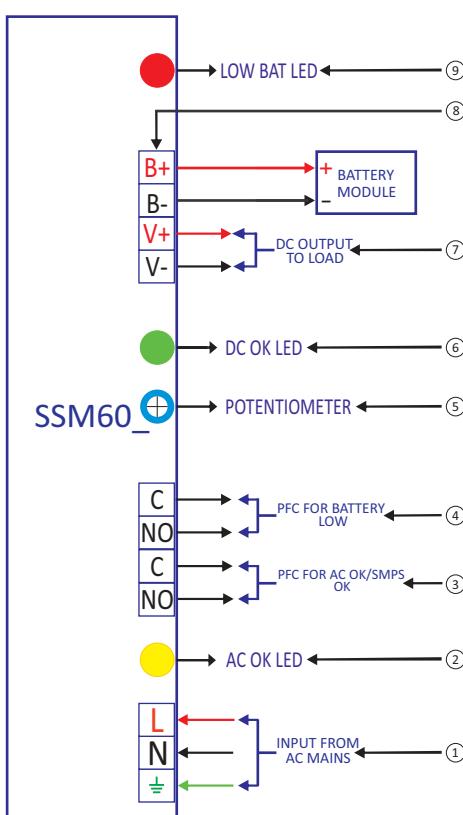


| Sr. No. | Description of all the functions                                       |
|---------|--|
| 1.      | Connection of AC input: $\pm$ /N/L.                                    |
| 2.      | AC input indication: AC OK-Yellow LED.                                 |
| 3.      | Potential Free Contact for AC OK/SMPS OK.                              |
| 4.      | Potential Free Contact for Battery Low.                                |
| 5.      | Potentiometer, output voltage: 12-15VDC (24-29VDC in case of SSM6024). |
| 6.      | DC output indication: DC OK-Green LED.                                 |
| 7.      | Connection of DC output: -V/+V.  |
| 8.      | Connection of battery: -B/+B.  |
| 9.      | Low battery indication: LOW BAT-Red LED.                               |

## 60W SMPS CUM BATTERY CHARGER

### DERATING CURVE:

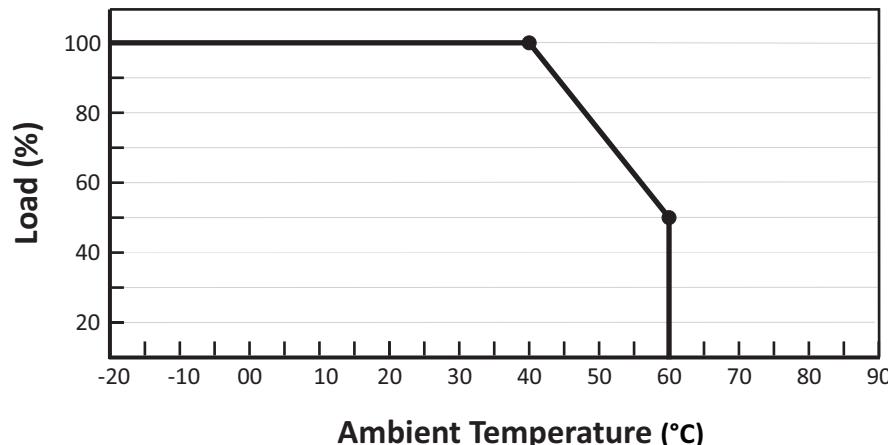

### OUTPUT DERATING VS INPUT VOLTAGE:

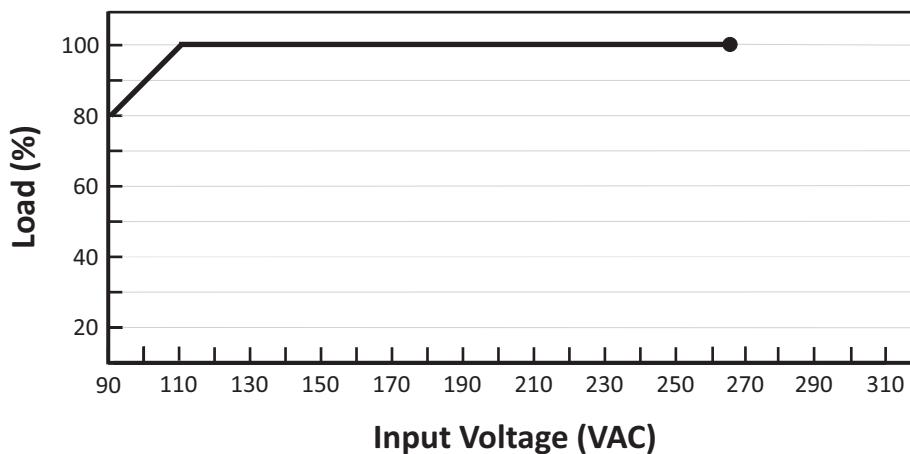

\* For continuous improvement, specifications are subject to change without prior intimation.